

Electrodos para medida de pH/redox Orbisint CPS 11/12/13

Electrodos para medir el pH/redox en procesos industriales,
con diafragma de PTFE, resistente al ensuciamiento, y
también con un sensor de temperatura Pt 100 integrado



CPS 11 con conexión GSA



CPS 11 con conexión ESA

Ventajas a primera vista

- El diafragma de PTFE, esterilizable y repelente de suciedad que previene el bloqueo y asegura precisión y estabilidad a largo plazo.
- El electrolito sólido "Politex" que permite su uso a unas presiones de hasta 6 bar, sin contrapresión alguna.
- El puente electrolítico integrado que proporciona una mejor protección contra contaminantes del electrodo, tales como S²⁻ y CN⁻.
- El cartucho de referencia largo que prolonga considerablemente la duración de servicio.
- Son apropiados para valores de pH de 0 hasta 14 y temperaturas de -15 hasta +130 °C.
- Hay varias membranas de vidrio para la medida de pH, incluso para aquellas aplicaciones de la industria de transformación que incluyen una esterilización en corrientes de vapor (máx. 130 °C) o que se realizan en medios muy ácidos.
- El cartucho integrado con sal de KCl que permite hacer medidas incluso cuando las conductividades son muy bajas.
- Las tres longitudes: 120, 225 y 360 mm.
- También hay electrodos combinados para pH en los que se ha integrado el sensor de temperatura Pt 100. Basta una única posición para montar el electrodo y un sólo cable de conexión. Proporcionan una medida continua y precisa del pH con compensación del efecto de la temp.
- El conector ESA TOP 68 (IP 68).
- El vidrio perfeccionado de tipo B que es esterilizable.

Campos de aplicación

- Tecnología y control de procesos industriales
 - Industria papelera
 - Química de materiales plásticos
 - Centrales eléctricas (p.ej. depuradoras de gases de combustión)
 - Plantas incineradoras
 - Industria de la alimentación (p.ej. fermentadores)
 - Fábricas de cerveza
- Tratamiento de aguas
 - Agua potable
 - Agua para la alimentación de calderas
 - Agua de refrigeración
 - Agua de pozo
 - Agua de elevada pureza

Quality made by
Endress+Hauser



ISO 9001

Endress+Hauser



The Power of Know How



Construcción y dimensiones de los electrodos



Izquierda:
Electrodos combinados Orbisint CPS 11 para pH con sensor de temperatura integrado

Derecha:
Electrodos combinados Orbisint CPS 12 para redox

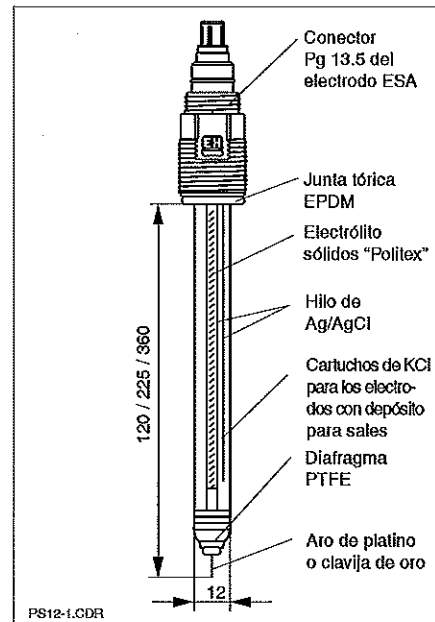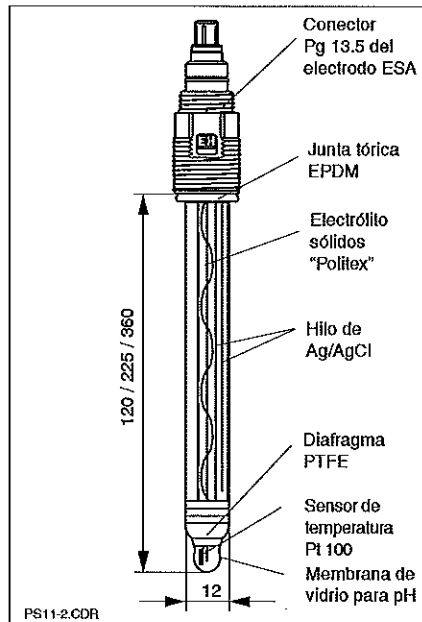

Izquierda:
Electrodos combinados Orbisint CPS 11 para pH

Derecha:
Deriva del electrodo Orbisint con cartucho de sales en medios de baja conductividad

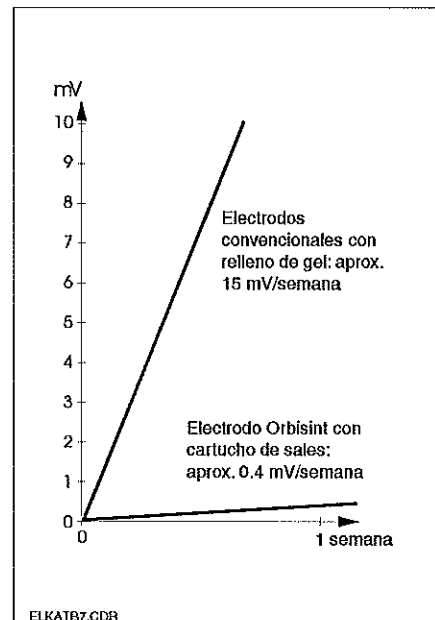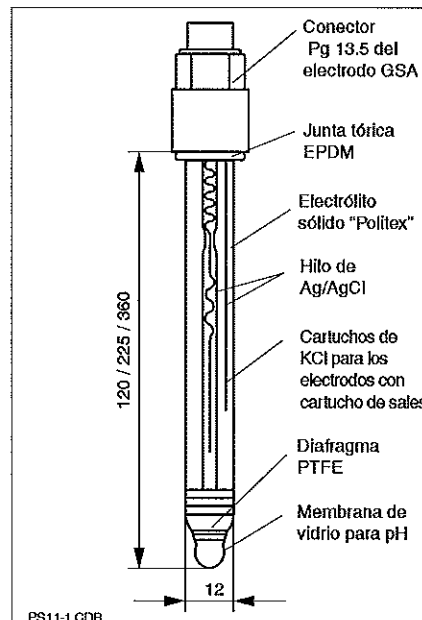

Selección del electrodo para medida pH

Al seleccionar el electrodo adecuado hay que tener en cuenta tanto el valor del pH como la temperatura, la presión y la conductividad del medio que se va a medir. La tabla con los rangos de temperatura/pH es una buena guía a la hora de seleccionar la membrana de vidrio apropiada para las medidas de pH

La conductividad del medio a medir es la magnitud que permite seleccionar el sistema de referencia apropiado.

- $\geq 50 \mu\text{S/cm}$: electrodo Orbisint estándar
- $\geq 10 \mu\text{S/cm}$: electrodo Orbisint con cartucho de sales.

Finalmente se selecciona el cabezal de conexión y la longitud adecuada del electrodo en conformidad con el código de pedido.

Conector

GSA

Conector coaxial para electrodos sin sensor de temp.


HDA

Conector tetrapolar para los electrodos de pH con sensor de temperatura integrado (IP 65).

ESA

El nuevo conector TOP 68 adecuado para todos los electrodos para pH y redox, tengan o no un sensor de temperatura integrado. La conexión ESA/ESS garantiza una conexión estable entre el cable de medida y el electrodo, incluso cuando las condiciones de funcionamiento son exigentes. El conector es robusto, estanco (IP 68) y muy resistente a agentes químicos. Es apropiado para aplicaciones Ex en áreas 0/1G conforme a ATEX 100a. El adaptador TOP 68/SMEK permite conectar los electrodos ESA a un cable SMEK (número de pedido 51501123).

Rangos de temperatura y pH

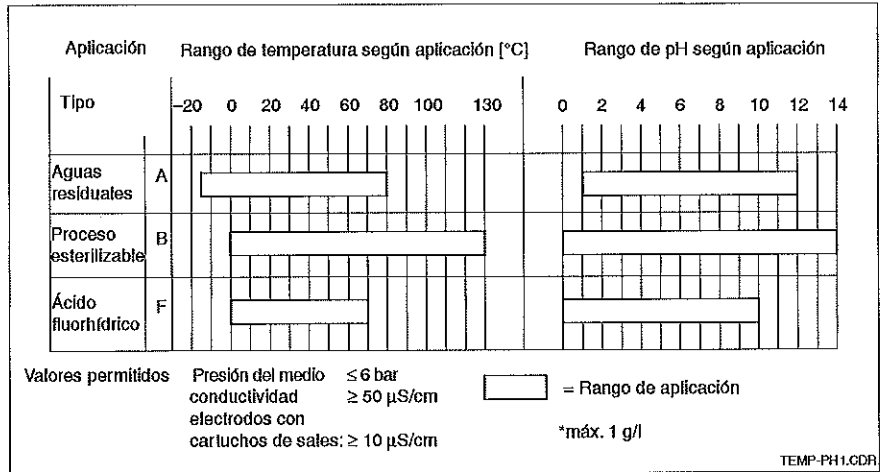

Datos técnicos

Datos generales

Fabricante	Endress+Hauser
Identificación del producto	Orbisint CPS 11/12/13

Conexiones eléctricas

Conector	Conector GSA con Pg 13.5 para aplicaciones industriales Conector GFC con Pg 13.5 para aplicaciones industriales, cable de 5 m sólo para electrodos combinados con Pt 100 integrada Conector ESA con Pg 13.5 para aplicaciones industriales (clase IP 68 de mayor protección), sustituye al conector TSA Conector TSA, cabezal de conexión tetrapolar con Pg 13.5 (no disponible después de 2001)
Longitud del electrodo	120 / 225 / 360 mm
Material del electrodo	Vidrio sin plomo apropiado para procesos industriales

Sistema de referencia

Referencia	Ag/AgCl
Electrolito	Poilitex 3 mol KCL, sin AgCl
Rango de presión	6 bar
Diafragma	Diafragma anular de Teflon*, esterilizable
Rango de temperatura	-15 ... 130 °C
Conductividad mínima	≥ 50 μS/cm; en caso de electrodos con cartucho de sales ≥ 10 μS/cm
Vidrios de membrana para pH	Tipo A, B, F
Rango de pH	0 ... 14
Punto cero de la cadena	E ₀ = 7.0
Elemento para la medida de redox	Aro de platino o clavija de oro

*Marca registrada de Dupont

Sujeto a modificaciones

Estructura del producto

Electrodos Orbisint CPS 11 para pH	
Tipo de electrodo	1 Combinado para pH / E ₀ = 7,0 (no admite TSA) 2 Combinado para pH / E ₀ = 7,0 / con Pt 100 (sólo para TSA/ESA)
Rangos según aplicación	AA pH = 1 ... 12, T = -15 ... 80 °C AS pH = 1 ... 12, T = -15 ... 80 °C / cartucho de sales BA pH = 0 ... 14, T = 0 ... 130 °C / esterilizable FA pH = 0 ... 10, T = 0 ... 70 °C / HF máx. 1 g/l
Longitud del electrodo	2 120 mm 4 225 mm 5 360 mm
Conector	GSA Conector enchufable con rosca Pg 13.5 GFC Conector con rosca Pg 13.5 / cable de 5 m TSA Conector con rosca Pg 13.5, tetrapolar, para electrodos con Pt 100 (no disponible antes de 2001) ESA Conector con rosca Pg 13.5, TOP 68
CPS 11-	[] [] [] [] código de pedido completo

Selección del electrodo para redox

La selección del electrodo apropiado para redox depende principalmente del tipo de medio.

- **Electrodo de oro** para medios oxidantes como, por ejemplo, en el caso de oxidaciones alcalinas, oxidaciones con nitritos, medidas de ozono, medidas en peróxido de hidrógeno.

• **Electrodo de platino** para medios reductores/neutros como, por ejemplo, en el caso de reducciones con cromatos, adición de clorina en piscinas.

Finalmente se selecciona el conector de conexión y la longitud adecuado del electrodo en conformidad con el código de pedido.

Electrodos Orbisint CPS 12 para redox				
Tipo de electrodo				
0	Versión estándar			
Elemento medidor				
NA	Clavija de oro			
PA	Aro de platino			
Longitud del eje				
2	120 mm			
4	225 mm (sólo GSA/ESA)			
5	360 mm (sólo GSA/ESA)			
Conector				
GSA	Conector enchufable con rosca Pg 13.5			
ESA	Conector enchufable con rosca Pg 13.5, TOP 68			
CPS 12-				código de pedido completo

Electrodos de referencia

A combinar con los electrodos individuales CPS 64 para pH. Puede encontrar información detallada al respecto en la "Información técnica sobre CPS 64/65" (nº de pedido 50054653).

Electrodos de referencia Orbisint CPS 13				
Tipo de electrodo				
0	Versión estándar			
Electrolito				
TA	Relleno de gel Politex (sólo para 120 mm)			
TD	Relleno de gel Politex y referencia doble (sólo para 80 mm)			
Longitud				
1	60 mm (sólo 1 TD)			
2	120 mm			
Conector				
GSA	Conector enchufable con rosca Pg 13.5			
ESA	Conector enchufable con rosca Pg 13.5, TOP 68			
CPS 13-				código de pedido completo

Endress+Hauser GmbH+Co.
- Instruments International -
P.O. Box 2222
D-79574 Weil am Rhein
Tel. (07621) 975 - 02
Fax (07621) 975345

Endress+Hauser
The Power of Know How




Technical Information

Orbipac CPF81D/CPF82D and CPF81/CPF82

pH/ORP compact electrodes, with digital
Memosens technology or analog

For processes in mining industries and for
treatment of industrial water and wastewater

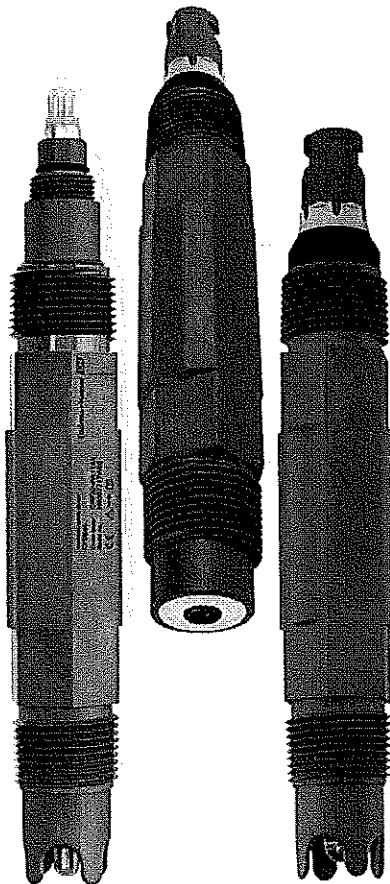

Application

- Flotation
- Leaching
- Neutralization
- Outlet monitoring

Your benefits

- With patented KNO_3 electrolyte bridge for better protection against electrode poisons such as S^{2-} or CN ions
- Optionally available with flat membrane for improved wear resistance
- Threaded connection NPT $\frac{3}{4}$ " top and bottom for easy installation at user end
- Suitable for measurements within pH range 0 to 14 and within temperature range 0 to 110 °C (32 to 230 °F)
- Digital pH sensors with integrated temperature sensor, analog pH electrodes with or without integrated temperature sensor
- Protection guard against damage

Other advantages of Memosens technology

- Maximum process safety owing to non-contact, inductive signal transmission
- Data security thanks to digital data transmission
- Very easy to use as sensor data saved in the sensor
- Predictive maintenance possible as sensor load data logged in the sensor

Function and system design

Measuring principle

pH measurement

The pH value is used as a unit of measurement for the acidity or alkalinity of a liquid medium. The membrane glass of the electrode supplies an electrochemical potential which is dependent upon the pH value of the medium. This potential is generated by the selective penetration of H^+ ions through the outer layer of the membrane. An electrochemical boundary layer with an electric potential forms at this point. An integrated Ag/AgCl reference system serves as the required reference electrode. The transmitter converts the measured voltage into the corresponding pH value using the Nernst equation.


ORP measurement

The ORP potential is a unit of measurement for the state of equilibria between oxidizing and reducing components of a medium. The ORP is measured using a platinum or gold electrode instead of the pH-sensitive glass membrane. Analog to the pH measurement, an integrated Ag/AgCl reference system is used as a reference electrode.

Measuring system

A complete measuring system comprises:

- Sensor CPF81D, CPF81, CPF82D or CPF82
- Transmitter, e.g. Liquiline CM44x/R or Liquiline M CM42
- Measuring cable, e.g. CYK10 or sensor's fixed cable

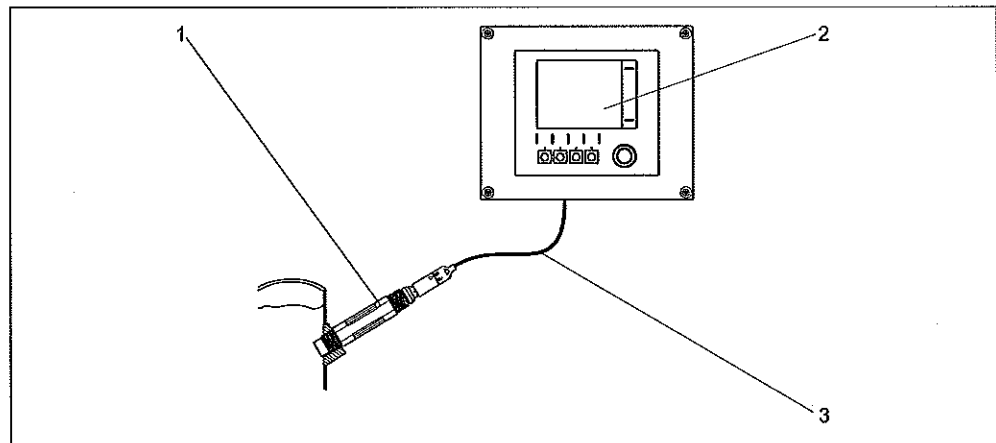

A0024721

1 Example of a measuring system

- 1 Sensor CPF81D
- 2 Liquiline CM44x transmitter
- 3 Measuring cable CYK10

Communication and data transmission

Communication with the transmitter

Always connect digital sensors to a transmitter with Memosens technology. Data transmission to a transmitter for analog sensors is not possible.

The digital sensors are able to store the following system data in the sensor.

- **Manufacturing data**
 - Serial number
 - Order code
 - Date of manufacture
- **Calibration data**
 - Calibration date
 - Calibrated slope at 25 °C (77 °F) (CPF81D)
 - Calibrated zero point at 25 °C (77 °F) (CPF81D)
 - Calibrated offset (CPF82D, ORP mV measuring mode)
 - Slope as % (CPF82D, ORP % measuring mode)
 - Temperature offset
 - Number of calibrations
 - Serial number of the transmitter used for the last calibration
 - Calibration database (stores the last 8 calibrations in the Memosens head)
- **Application data**
 - Temperature application range
 - pH application range (CPF81D)
 - ORP application range (CPF82D)
 - Date of first commissioning
 - Maximum temperature value
 - Operating hours at temperatures above 80 °C (176 °F) and 100 °C (212 °F)
 - Operating hours at very low and very high pH values (Nernst voltage below -300 mV, above +300 mV)

Reliability

Dependability

Easy handling

Sensors with Memosens technology have integrated electronics that allow for saving calibration data and further information such as total hours of operation and operating hours under extreme measuring conditions. Once the sensor has been connected, the sensor data are transferred automatically to the transmitter and used to calculate the current measured value. As the calibration data are stored in the sensor, the sensor can be calibrated and adjusted independently of the measuring point. The result:

- Easy calibration in the measuring lab under optimum external conditions increases the quality of the calibration.
- Pre-calibrated sensors can be replaced quickly and easily, resulting in a dramatic increase in the availability of the measuring point .
- Maintenance intervals can be defined based on all stored sensor load and calibration data and predictive maintenance is possible.
- The sensor history can be documented on external data carriers and evaluation programs at any time. Thus, the current application of the sensors can be made to depend on their previous history.

Interference immunity

Data security thanks to digital data transmission

Memosens technology digitizes the measured values in the sensor and transmits the data to the transmitter using a non-contact connection that is free from potential interference. The result:

- Automatic error message if sensor fails or connection between sensor and transmitter is interrupted
- Immediate error detection increases measuring point availability


Safety

Maximum process safety

With inductive transmission of the measured value using a non-contact connection, Memosens guarantees maximum process safety and offers the following benefits:


- All problems caused by moisture are eliminated.
 - Plug-in connection free from corrosion
 - Measured value distortion from moisture is not possible.
 - The plug-in system can even be connected under water.
- The transmitter is galvanically decoupled from the medium. Issues concerning "symmetrical high-impedance" or "asymmetry" or an impedance converter are a thing of the past.
- EMC safety is guaranteed by screening measures for the digital transmission of measured values.


Input

Measured values	CPF81D, CPF81	
	pH value Temperature	
Measuring range	CPF82D, CPF82	
	ORP	
Measuring range	CPF81D, CPF81	
	Version LH:	
	pH	0 ... 14
	Temperature	0 to 110 °C (32 to 230 °F)
	Version NN:	
	pH	0 to 14 (11 to 14 with reduced accuracy)
Temperature	0 to 80 °C (32 to 170 °F)	
Measuring range	CPF82D, CPF82	
	-1500 mV to +1500 mV	
	 Please note the process operating conditions.	


Power supply


Electrical connection	CPF81D and CPF82D
	The electrical connection of the sensor to the transmitter takes place via special measuring cable CYK10 or CYK20.

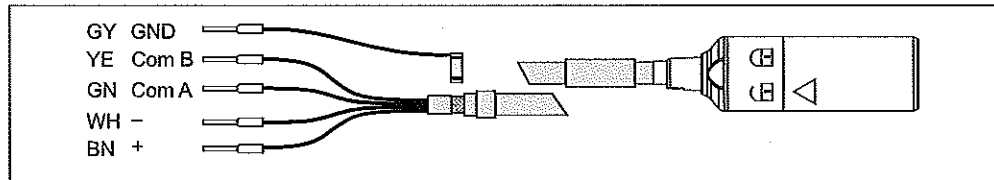


 2 Measuring cable CYK10/CYK20

CPF81 and CPF82 with TOP68 plug-in head

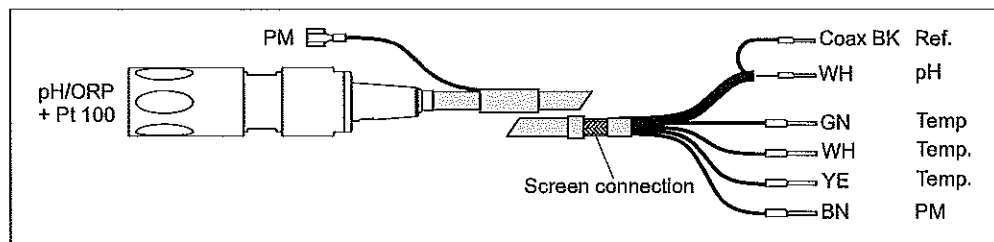

 3 Measuring cable CPK9

CPF81 and CPF82 with fixed cable

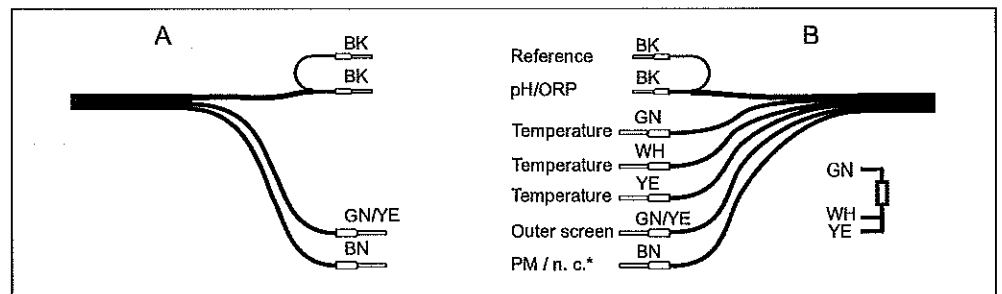

4 Fixed cable connection


A Fixed cable CPF81 without temperature sensor and CPF82

B Fixed cable CPF81 with temperature sensor

* The PML is connected only in the case of sensor versions with an internal PML (CPF81-xxx2xx)


Installation

Installation instructions

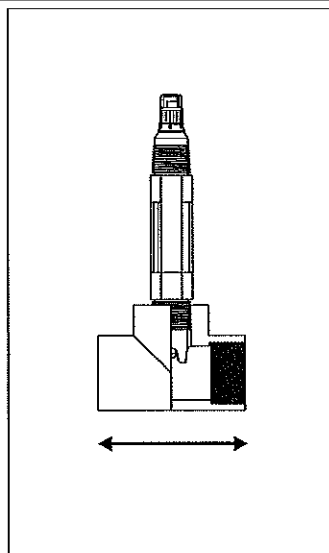

A0024691

5 Flow installation

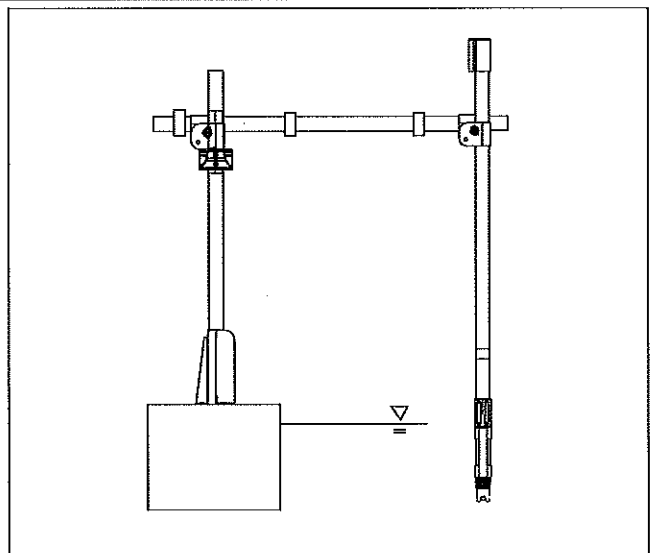

A0024690

6 Immersion installation with Flexdip CYA112

i Make sure to follow the installation instructions in the Operating Instructions of the used assembly.


Environment

Ambient temperature	NOTICE Danger of frost damage ► The sensor must not be used at temperatures below 0 °C (32 °F).
Storage temperature	0 to 50 °C (32 to 120 °F)
Degree of protection	CPF81D, CPF82D IP 68 (10 m (33 ft) head of water at 25 °C (77 °F) over 45 days, 1 mol/l KCl) CPF81, CPF82 with TOP68 plug-in head IP 68 (1 m (3.3 ft) water column, 50 °C (122 °F), 168 h) CPF81, CPF82 with fixed cable IP 67
Electromagnetic compatibility	Interference emission and interference immunity in accordance with EN 61326-1:2006, EN 61326-2-3:2006 Memosens versions for ESD > 8 kV: reduced accuracy ± 1.5 pH

Process

Process temperature	CPF81D, CPF81	
	Version LH	0 to 110 °C (32 to 230 °F)
	Version NN	0 to 80 °C (32 to 170 °F)
	CPF82D, CPF82	0 to 80 °C (32 to 170 °F)
Process pressure	1 to 10 bar absolute, at 80 °C (15 to 145 psi absolute, at 176 °F)	

Pressure temperature load curve

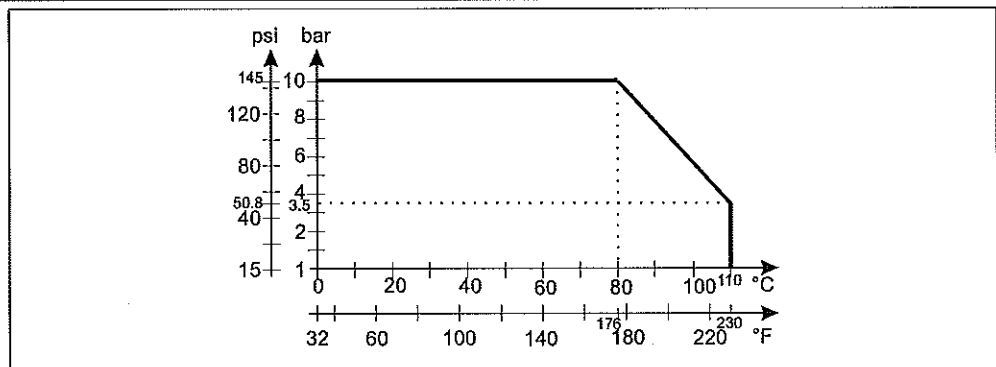


A6024763

Glass impedance	150 M Ω at 25 °C (77 °F)
Minimum conductivity	50 μ S/cm


Mechanical construction

Design, dimensions


CPF81D, CPF82D

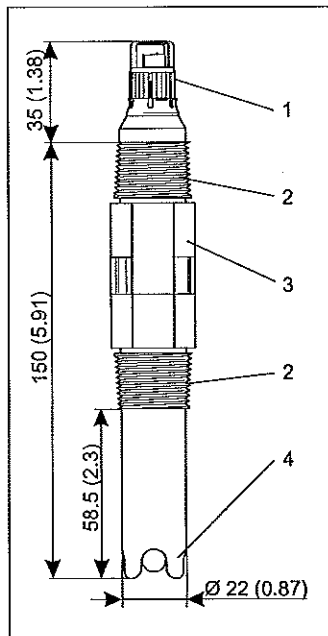

A0024672

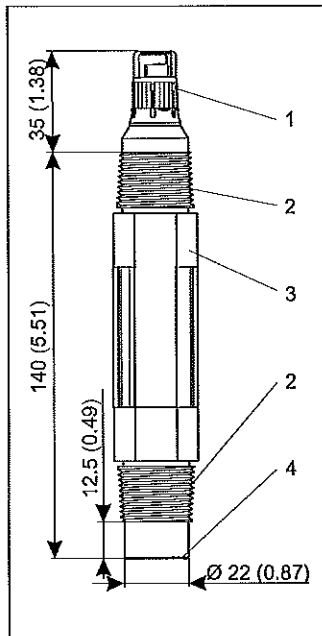

A0024672

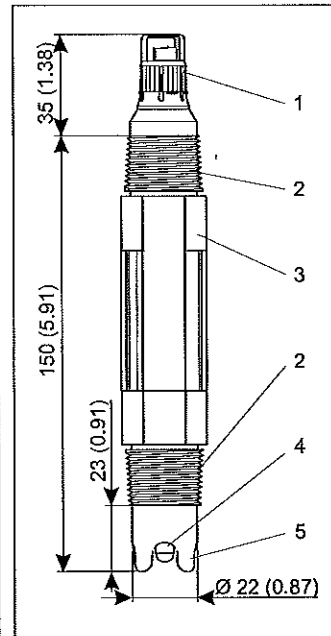

A0024673

☒ 7 CPF81D, long shaft, protection guard

- 1 Memosens plug-in head
- 2 NPT 3/4" thread
- 3 Across flats AF 26
- 4 Protection guard

☒ 8 CPF81D, flat membrane


- 1 Memosens plug-in head
- 2 NPT 3/4" thread
- 3 Across flats AF 26
- 4 Flat membrane

☒ 9 CPF82D, short shaft, protection guard

- 1 Memosens plug-in head
- 2 NPT 3/4" thread
- 3 Across flats AF 26
- 4 Platinum ring
- 5 Protection guard

Dimensions in mm (inch)

CPF81, CPF82

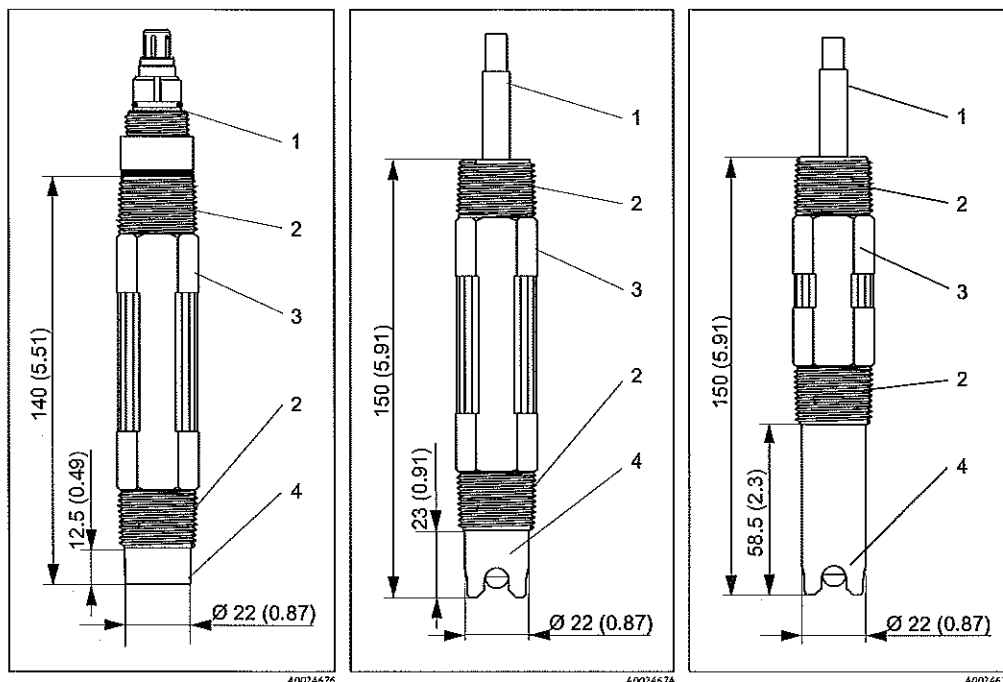

10 CPF81 with TOP68 plug-in head, short shaft, flat membrane

- 1 TOP68 plug-in head
- 2 NPT 3/4" thread
- 3 Across flats AF 26
- 4 Flat membrane

Dimensions in mm (inch)

11 Fixed-cable version, short shaft, protection guard

- 1 Fixed cable
- 2 NPT 3/4" thread
- 3 Across flats AF 26
- 4 Protection guard

12 Fixed-cable version, long shaft, protection guard

- 1 Fixed cable
- 2 NPT 3/4" thread
- 3 Across flats AF 26
- 4 Protection guard

Weight 0.12 to 0.15 kg (0.26 to 0.33 lbs, depending on version and without cable)


Materials

Housing, electrode shaft	PPS
pH electrode (in contact with medium)	Lead-free membrane glass, suitable for process applications
ORP electrode (in contact with medium):	Platinum ring
Double chamber reference system:	KNO ₃ and KCl/AgCl

Process connection NPT 3/4"

Integrated preamplifier (optional)




Structure	cast in sensor body
Power supply	via integrated coin cells
Reference potential:	reference electrode

 With preamplifier versions, the sensor check function (SCS) of the transmitter is ineffective and should be turned off.


Certificates and approvals




Ex approval (optional) FM IS NI Cl. I Div. 1&2, Groups A-D

Ordering information

Product page	<p>www.endress.com/cpf81d www.endress.com/cpf81 www.endress.com/cpf82d www.endress.com/cpf82</p>
Product Configurator	<p>The navigation area is located on the right of the product page.</p> <ol style="list-style-type: none"> Under "Device support" click "Configure your selected product". ↳ The Configurator opens in a separate window. Select all the options to configure the device in line with your requirements. ↳ In this way, you receive a valid and complete order code for the device. Export the order code as a PDF or Excel file. To do so, click the appropriate button at the top of the screen.
Scope of delivery	<p>The scope of delivery includes:</p> <ul style="list-style-type: none">▪ Sensor in the version ordered▪ Technical Information

Accessories

 The following are the most important accessories available at the time this documentation was issued. For accessories not listed here, please contact your service or sales office.

Assembly	<p>Flexdip CYA112</p> <ul style="list-style-type: none">▪ Immersion assembly for water and wastewater▪ Modular assembly system for sensors in open basins, channels and tanks▪ Product Configurator on the product page: www.endress.com/cya112 <p> Technical Information TI00432C</p>
Measuring cables	<p>CYK10 Memosens data cable</p> <ul style="list-style-type: none">▪ For digital sensors with Memosens technology▪ Product Configurator on the product page: www.endress.com/cyk10 <p> Technical Information TI00118C</p> <p>CPK9</p> <ul style="list-style-type: none">▪ Terminated measuring cable for connecting analog sensors with TOP68 plug-in head▪ Selection in accordance with product structure <p> For more information and to order, please contact your sales office.</p>

Buffer	<p>High-quality buffer solutions from Endress+Hauser - CPY20</p> <p>The secondary buffer solutions have been referenced to primary reference material of the PTB (German Federal Physico-technical Institute) and to standard reference material of NIST (National Institute of Standards and Technology) according to DIN 19266 by a DKD (German Calibration Service) accredited laboratory.</p> <p>Product Configurator on the product page: www.endress.com/cpy20</p> <p>Technical buffer solutions for ORP electrodes</p> <ul style="list-style-type: none">▪ +220 mV, pH 7, 100 ml; order no. CPY3-0▪ +468 mV, pH 0.1, 100 ml; order no. CPY3-1
---------------	--

C

C

C

C

C

C

C

C

www.addresses.endress.com
